

JAYCO



S Series




JAYCO - Standard Bearing housing



'S' Series Plummer Blocks

JAYCO Make 'S' Series Plummer Blocks are manufactured in a wide range from $\frac{3}{4}$ " / 20 mm to 8" / 200 mm shaft size. These housings are designed to suit **double-row self-aligning ball bearings and spherical roller bearings.

The **JAYCO S-500** Series is suitable for 1200 K, 2200 K, and 22200 CK series bearings with adapter sleeves, while the **JAYCO S-600** Series is suitable for 1300 K, 2300 K, and 22300 CK series bearings with adapter sleeves.

Size	Suitable Bearing Series
S-500	1200 K, 2200 K, 22200 CK series bearings with Adapter Sleeves.
S-600	1300 K, 2300 K, 22300 CK series bearings with Adapter Sleeves.
S-200	1200, 2200, 22200 C series Cylindrical / Straight Bore Bearings.
S-300	1300, 2300, 22300 C series Cylindrical / Straight Bore Bearings.

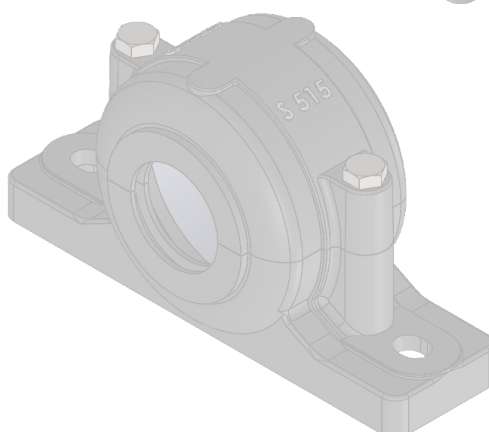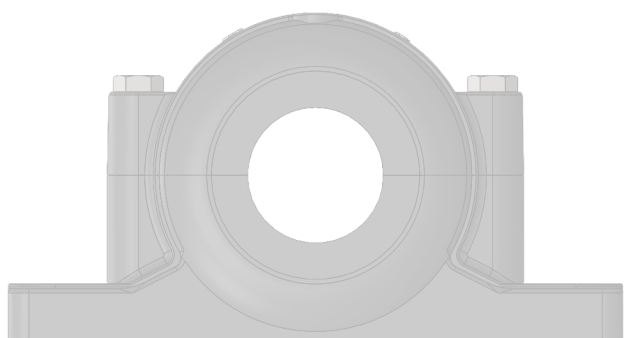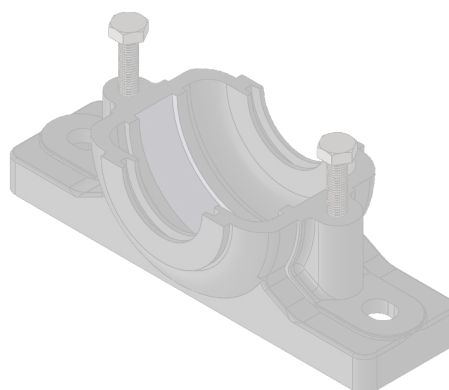

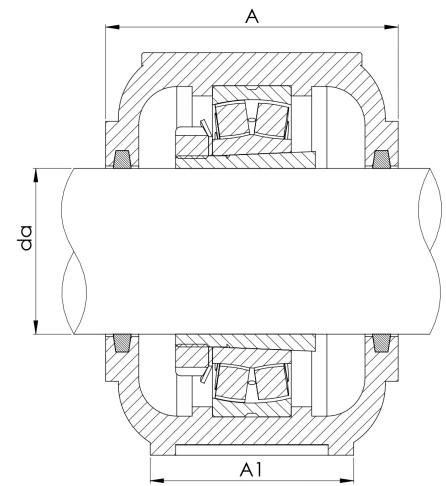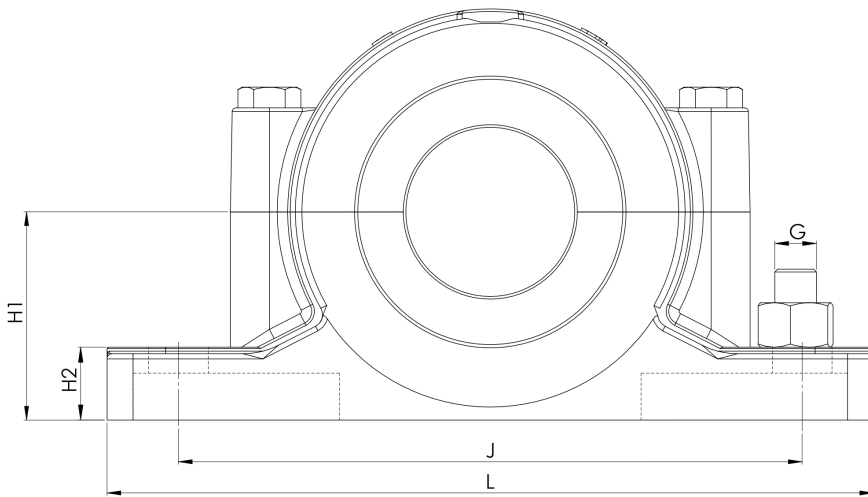

HOUSING NO.	All Dimensions are in M.M.								
	Shaft Dia da		S 500 SERIES						
	M.M.	Inch.	A	A1	H1	L	J	H2	G
S 505	20	3/4	62	52	40	165	125	12	1/2
S 506	25	1	80	55	50	190	150	17	1/2
S 507	30	1.1/8	82	52	50	190	150	18	1/2
S 508	35	1.1/4	87	60	60	210	167	18	1/2
S 509	40	1.1/2	90	60	60	220	170	20	1/2
S 510	45	1.3/4	90	60	60	220	170	20	1/2
S 511	50	2	95	66	70	270	213	20	5/8
S 512	55	2.1/8	105	67	70	270	213	23	5/8
S 513	60	2.1/4	110	80	80	290	230	25	5/8
S 514	60	2.3/8	110	80	80	287	235	28	5/8
S 515	65	2.1/2	115	80	80	295	240	28	5/8
S 516	70	2.3/4	120	90	95	330	260	27	5/8
S 517	75	3	125	90	95	330	260	28	3/4
S 518	80	3.1/8	130	97	100	360	290	29	3/4
S 519	85	3.1/4	140	100	112	360	290	33	3/4
S 520	90	3.1/2	150	110	112	400	320	33	3/4
S 522	100	4	160	120	125	420	350	33	7/8
S 524	110	4.1/4	175	117	140	420	350	36	7/8
S 526	115	4.1/2	190	128	150	455	385	40	7/8
S 528	125	5	202	152	150	505	415	42	1.1/8
S 530	135	5.1/4	210	158	160	540	445	50	1.1/8
S 532	140	5.1/2	214	160	170	565	470	50	1.1/4
S 534	150	6	252	170	180	625	520	50	1.1/4
S 536	160	6.1/2	252	170	190	680	565	65	1.1/4
S 538	170	6.3/4	255	190	200	710	580	60	1.1/2
S 540	180	7	270	203	210	757	615	60	1.1/2

HOUSING NO.	All Dimensions are in M.M.								
	Shaft Dia da		S 600 SERIES						
	M.M.	Inch.	A	A1	H1	L	J	H2	G
S 605	20	3/4	80	52	50	190	150	16	1/2
S 606	25	1	82	52	50	190	150	18	1/2
S 607	30	1.1/8	92	60	60	215	162	20	1/2
S 608	35	1.1/4	92	64	60	215	162	20	1/2
S 609	40	1.1/2	95	69	70	275	210	23	5/8
S 610	45	1.3/4	115	70	70	270	210	23	5/8
S 611	50	2	115	80	80	290	233	25	5/8
S 612	55	2.1/8	115	80	80	290	230	25	5/8
S 613	60	2.1/4	126	87	95	325	260	27	5/8
S 614	60	2.1/4	128	94	95	330	265	27	3/4
S 615	65	2.1/2	129	97	100	360	290	27	3/4
S 616	70	2.3/4	140	100	112	365	290	27	3/4
S 617	75	3	162	110	112	395	320	33	3/4
S 618	80	3.1/8	165	122	125	422	340	30	3/4
S 619	85	3.1/4	165	125	125	422	340	37	3/4
S 620	90	3.1/2	178	119	140	422	358	40	1
S 622	100	4	190	130	150	455	378	40	1.1/8
S 624	110	4.1/4	210	158	160	540	445	48	1.1/4
S 626	115	4.1/2	212	157	170	560	470	48	7/8
S 628	125	5	255	170	180	630	520	50	1.1/8
S 630	135	5.1/4	255	170	190	685	565	65	1.1/8
S 632	140	5.1/2	260	190	200	720	580	65	1.1/4
S 634	150	6	270	203	212	757	615	65	1.1/4
S 636	160	6.1/2	270	210	225	795	650	65	1.1/4
S 638	170	6.3/4	285	220	240	830	680	70	1.1/2
S 640	180	7	300	230	250	870	720	70	1.1/2